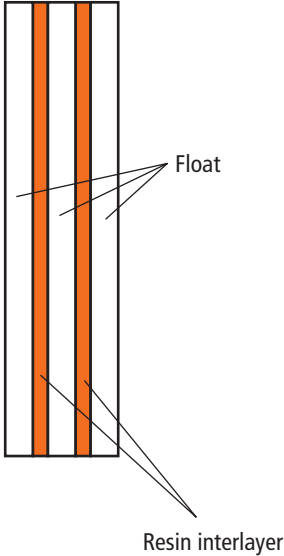




Product composition	Characteristics	3
 <p style="text-align: center;">Resin interlayer</p>	<ul style="list-style-type: none"> ▶ Pyroguard EW30 Maxi is cuttable with specialist equipment ▶ Available in stock sheets 1580 x 2780 mm ▶ Internal and external installation (UV stable) ▶ Fire protection from either side 	
Technical characteristics	Physical features	
<ul style="list-style-type: none"> ▶ Fire classification: EW30 ▶ Impact classification: 2B2 ▶ Light transmission: 85% ▶ Sound reduction: 35 dB ▶ U value: 5.1 W/m² K ▶ UV stability: yes 	<ul style="list-style-type: none"> ▶ Nominal Thickness: 11 mm ▶ Thickness tolerances: - 1 / + 1.4 mm ▶ Weight/m²: 26.7 kg ▶ Temperature range: - 20 / + 140 °C ▶ Min manufactured size: 	
	Possible applications	
<p style="text-align: center;"> F L E X I B L E I N D E P E N D E N T R E S P O N S I V E S P E C I F I C T E C H N I C A L FIRST IN FIRE GLASS </p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; justify-content: space-around; width: 100%;"> <div style="text-align: center;"> <p>Steel system</p>  </div> </div> <div style="display: flex; justify-content: space-around; width: 100%; margin-top: 20px;"> <div style="text-align: center;"> <p>Timber system</p>  </div> </div> <div style="display: flex; justify-content: space-around; width: 100%; margin-top: 10px;"> <div style="text-align: center;"> <p>Please see PV 12-A-422, page 90</p> </div> <div style="text-align: center;"> <p>Please see PV 12-A-423, page 91 & 92</p> </div> <div style="text-align: center;"> <p>CF 257 p 43</p> </div> </div> </div>	
30	06/2015	

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.