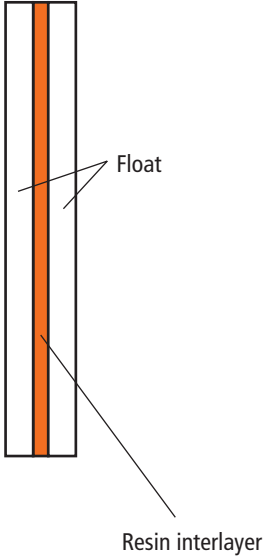



Product composition	Characteristics	9
	<ul style="list-style-type: none"> <li>▶ Pyroguard FD60 is cuttable with standard equipment</li> <li>▶ Available in stock sheets</li> <li>▶ Internal and external installation (UV stable)</li> <li>▶ Double sided fire resistance</li> </ul>	
Technical characteristics	Physical features	
<ul style="list-style-type: none"> <li>▶ Fire classification: E60</li> <li>▶ Impact classification: 3B3</li> <li>▶ Light transmission: 87%</li> <li>▶ Sound reduction: 33 dB</li> <li>▶ U value: 5.1 W/m<sup>2</sup> K</li> <li>▶ UV stability: yes</li> </ul>	<ul style="list-style-type: none"> <li>▶ Nominal Thickness: 7 mm</li> <li>▶ Thickness tolerances: - 0.6 / + 0.8 mm</li> <li>▶ Weight/m<sup>2</sup>: 17 kg</li> <li>▶ Temperature range: - 20 / + 140 °C</li> <li>▶ Min manufactured size:</li> </ul>	
	Possible applications	
<p style="text-align: center; letter-spacing: 0.5em;">F L E X I B L E  I N D E P E N D E N T  R E S P O N S I V E  S P E C I F I C  T E C H N I C A L  <b>FIRST IN FIRE GLASS</b></p>	<p style="text-align: center;">Timber system  CF 257 p 20</p>	
36	06/2015	

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.