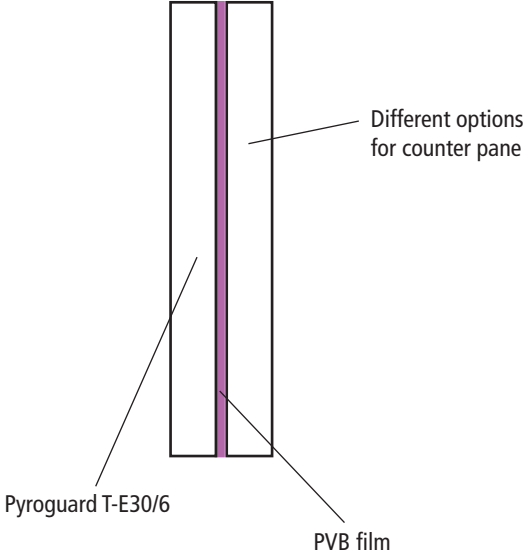



<p>Product composition</p>	<p>Characteristics 20</p>
 <p>Different options for counter pane</p> <p>Pyroguard T-E30/6</p> <p>PVB film</p>	<ul style="list-style-type: none"> ▶ Pyroguard T-E30/6 VF is composed of Pyroguard T-E30/6 and a counter pane with different options (satin, mirrored, screen print)
<p>Technical characteristics</p>	<p>Physical features</p>
<ul style="list-style-type: none"> ▶ Fire classification: E30 ▶ Impact classification: DC ▶ Light transmission: DC ▶ Sound reduction (c; ctr): DC ▶ U value: DC ▶ UV stability: yes 	<ul style="list-style-type: none"> ▶ Nominal Thickness: DC ▶ Thickness tolerances: DC ▶ Dimensional tolerances: ± 3 mm ▶ Weight/m²: DC ▶ Temperature range: ± 100 °C ▶ Min manufactured size: 300 x 400 mm
<p>Possible applications</p>	
<p>Steel system</p> 	<div style="text-align: center; font-weight: bold; letter-spacing: 0.5em;"> <p>FLEXIBLE INDEPENDENT RESPONSIVE SPECIFIC TECHNICAL</p> <p style="color: #c00000;">FIRST IN FIRE GLASS</p> </div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> 06/2015 47 </div>

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.