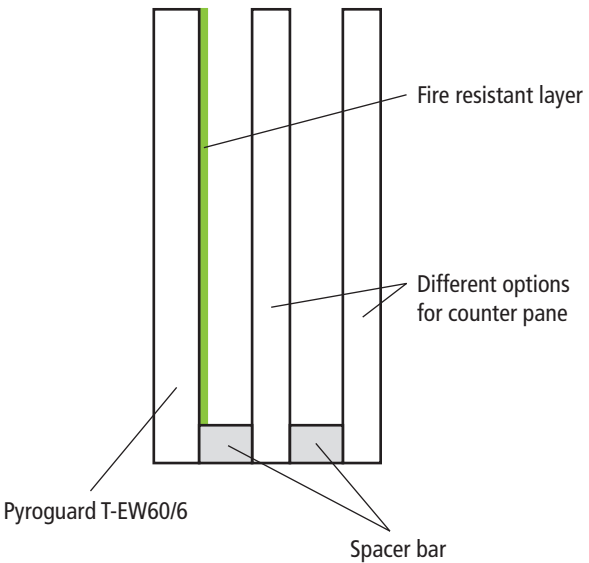



<p>Product composition</p>	<p>Characteristics <span style="float: right; background-color: #e67e22; color: white; padding: 2px 5px; font-weight: bold;">34</span></p>
 <p>Fire resistant layer</p> <p>Pyroguard T-EW60/6</p> <p>Spacer bar</p> <p>Different options for counter pane</p>	<ul style="list-style-type: none"> <li>▶ Optional triple glazing with Pyroguard T-EW30/6</li> <li>▶ Spacer bar in steel or aluminium from 6 to 20 mm with the possibility to add argon gas (depending on recommendations in the test report)</li> <li>▶ Counter panes:             <ul style="list-style-type: none"> <li>- float, toughened or laminated glass</li> <li>- security option</li> <li>- decorative glass (satin, mirrored, screen print)</li> <li>- low emissivity glass</li> <li>- solar control</li> </ul> </li> </ul> <p>(depending on recommendations in the test report)</p>
<p>Technical characteristics</p>	<p>Physical features</p>
<ul style="list-style-type: none"> <li>▶ Fire classification: EW60</li> <li>▶ Impact classification: DC</li> <li>▶ Light transmission: DC</li> <li>▶ Sound reduction (c; ctr): DC</li> <li>▶ U value: DC</li> <li>▶ UV stability: yes</li> </ul>	<ul style="list-style-type: none"> <li>▶ Nominal Thickness: DC</li> <li>▶ Thickness tolerances: DC</li> <li>▶ Dimensional tolerances: ± 3 mm</li> <li>▶ Weight/m<sup>2</sup>: DC</li> <li>▶ Temperature range: ± 100 °C</li> <li>▶ Min manufactured size: 300 x 400 mm</li> </ul>
<p>Possible applications</p>	
<p>Steel system</p> 	<div style="text-align: center; font-weight: bold; letter-spacing: 0.5em;"> <p>FLEXIBLE              INDEPENDENT              RESPONSIVE              SPECIFIC              TECHNICAL</p> <p style="color: #e67e22;">FIRST IN FIRE GLASS</p> </div> <div style="display: flex; justify-content: space-between; margin-top: 20px;"> <span>06/2015</span> <span>61</span> </div>

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.