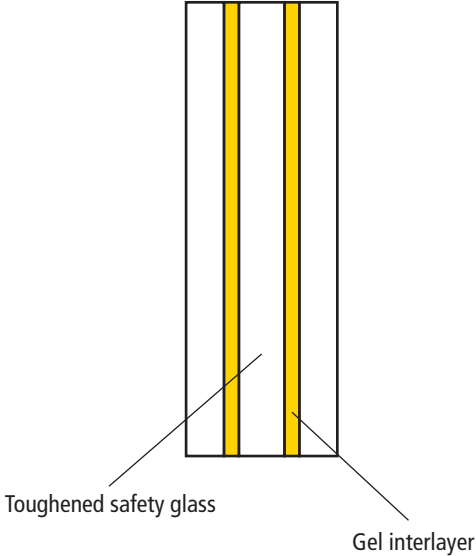




<p>Product composition</p>	<p>Characteristics</p> <p style="text-align: right;">49</p>	
	<ul style="list-style-type: none"> ▶ Fire resistant glass for 1 hour, comprising 2 intumescent gel filled chambers ▶ Assembly only in a timber frame 	
<p>Technical characteristics</p>	<p>Physical features</p>	
<ul style="list-style-type: none"> ▶ Fire classification: EI60 ▶ Impact classification: 1B1 ▶ Light transmission: 74% ▶ Sound reduction (c; ctr): 41 dB (- 2; - 3) ▶ U value: 4.3 W/m² K ▶ UV stability: yes 	<ul style="list-style-type: none"> ▶ Nominal Thickness: 26 mm ▶ Thickness tolerances: - 1 / + 2 mm ▶ Dimensional tolerances: ± 3 mm ▶ Weight/m²: 55 kg ▶ Temperature range: - 10 / + 45 °C ▶ Min manufactured size: 300 x 400 mm 	
	<p>Possible applications</p>	
<p>FLEXIBLE INDEPENDENT RESPONSIVE SPECIFIC TECHNICAL FIRST IN FIRE GLASS</p>	<p>Timber system  Please see PV 13-A-423, page 101</p>	
<p>76</p> <p>06/2015</p>		

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.