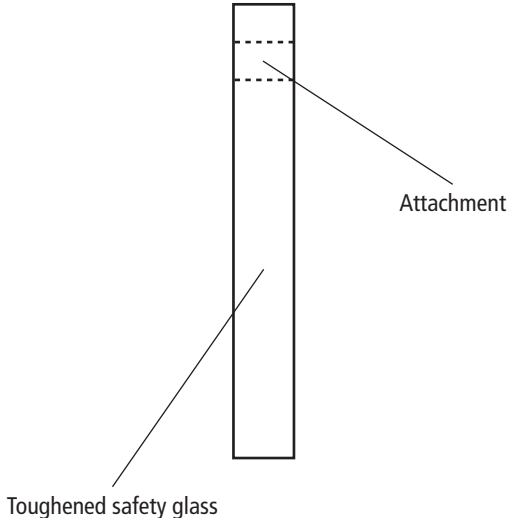



<p>Smokescreen</p>	<p>Characteristics</p>	<p>60</p>
	<ul style="list-style-type: none"> ▶ Smoke containment for hot gases and smoke meeting EN standards and benefitting from the highest classification: DH30 ▶ Maximum sizes tested 2500 x 1200 mm ▶ Available with all appropriate fixings for installation ▶ Hooks/attachements in mild steel or brushed stainless steel ▶ Can be supplied profiled to accommodate pipes and services ▶ Fastenings assured by a patented system ▶ Please see the individual brochure 	
<p>Technical characteristics</p>	<p>Physical features</p>	
<ul style="list-style-type: none"> ▶ Fire classification: DH30 ▶ Impact classification: Class 1C1 ▶ Light transmission: 87% ▶ Sound reduction (c; ctr): ND ▶ U value: ND ▶ UV stability: yes 	<ul style="list-style-type: none"> ▶ Nominal Thickness: 8 mm ▶ Thickness tolerances: ± 0.2 mm ▶ Dimensional tolerances: ± 2.5 mm ▶ Weight/m²: 20 kg ▶ Temperature range: ± 100 °C ▶ Min manufactured size: 300 x 400 mm 	
<p>Possible applications</p>		
<p>Steel system</p> 	<p>FLEXIBLE INDEPENDENT RESPONSIVE SPECIFIC TECHNICAL FIRST IN FIRE GLASS</p>	
		<p>06/2015 87</p>

The diagrams in this document are for guidance purpose only, for actual projects specific drawings are required.