

Statement of Verification

BREG EN EPD No.: 000268

Issue 02

This is to verify that the
Environmental Product Declaration
provided by:
Pyroguard




is in accordance with the requirements of:
EN 15804:2012+A1:2013
and
BRE Global Scheme Document SD207

This declaration is for:
Pyroguard T-Range Safety Glass

Company Address

Millfield Lane
Haydock
Merseyside
WA11 9GA

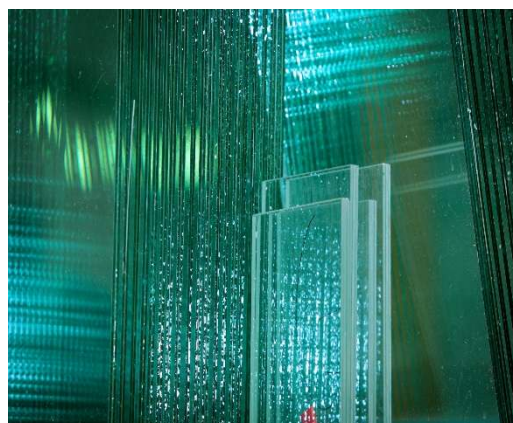

Emma Baker

Signed for BRE Global Ltd

Emma Baker
Operator

01 October 2024
Date of this Issue

03 October 2019
Date of First Issue

31 March 2025
Expiry Date



This Statement of Verification is issued subject to terms and conditions (for details visit www.greenbooklive.com/terms.
To check the validity of this statement of verification please, visit www.greenbooklive.com/check or contact us.
BRE Global Ltd., Garston, Watford WD25 9XX.
T: +44 (0)333 321 8811 F: +44 (0)1923 664603 E: Enquiries@breglobal.com



Environmental Product Declaration

EPD Number: 000268

General Information

EPD Programme Operator	Applicable Product Category Rules
BRE Global Watford, Herts WD25 9XX United Kingdom	BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804:2012+A1:2013
Commissioner of LCA study	LCA consultant/Tool
Pyroguard UK Ltd Millfield Lane Haydock Merseyside WA11 9GA United Kingdom	BRE LINA v2.0
Declared/Functional Unit	Applicability/Coverage
1m ² of Pyroguard T-range safety glass	Manufacturer specific product range
EPD Type	Background database
Cradle to Gate	ecoinvent v3.2
Demonstration of Verification	
CEN standard EN 15804 serves as the core PCR ^a	
Independent verification of the declaration and data according to EN ISO 14025:2010 <input type="checkbox"/> Internal <input checked="" type="checkbox"/> External	
(Where appropriate ^b) Third party verifier: Jane Anderson	
a: Product category rules b: Optional for business-to-business communication; mandatory for business-to-consumer communication (see EN ISO 14025:2010, 9.4)	
Comparability	
Environmental product declarations from different programmes may not be comparable if not compliant with EN 15804:2012+A1:2013. Comparability is further dependent on the specific product category rules, system boundaries and allocations, and background data sources. See Clause 5.3 of EN 15804:2012+A1:2013 for further guidance	

Information modules covered

Product			Construction		Use stage							End-of-life				Benefits and loads beyond the system boundary
A1	A2	A3	A4	A5	Related to the building fabric					Related to the building		C1	C2	C3	C4	D
Raw materials supply	Transport	Manufacturing	Transport to site	Construction – Installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction demolition	Transport	Waste processing	Disposal	Reuse, Recovery and/or Recycling potential
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Note: Ticks indicate the Information Modules declared.

Manufacturing sites

Pyroguard France SARL
Parc d'activités communautaire no.1
145 rue des Roseaux
57455 Seingbouse
France

Pyroguard UK Ltd
Unit H1
Haydock Cross Industrial Estate
Kilbuck Lane
Haydock
WA11 9UX
United Kingdom

Construction Product:

Product Description

Pyroguard makes fire resistant glasses providing various levels of fire protection in a range of dimensions. The Pyroguard T product range (data for which is modeled in this project) consists of modified toughened monolithic glasses and modified toughened laminated glasses containing patented nano composite gel interlayers.

Pyroguard T glass is suitable for use in ambitious architectural projects as it is available in large sizes to fit glass walls or ceilings. It enables the transmission of natural light, provides acoustic control and thermal and solar performance when incorporated into IGU's, losing no aesthetic benefits while maintaining the highest standards of safety. Pyroguard T is commonly specified for applications such as fully glazed, fire resistant atriums and façades, which can include fire-rated glazed spandrel panels.

Technical Information

The table below covers the basic technical properties of all of the Pyroguard T-range products.

Property	Value, Unit	Value, Unit	Value, Unit	Value, Unit	Value, Unit
	Pyroguard T EI 47-3	Pyroguard T EW 13-1	Pyroguard T EI 18-2	Pyroguard T EI 25-3	Pyroguard T EI 32-2
Mass per area	96 kg/m ²	30 kg/m ²	39 kg/m ²	54 kg/m ²	66 kg/m ²
Thickness	47 mm	13 mm	18 mm	25 mm	32 mm
Minimum size	300 x 400 mm	300 x 400 mm	300 x 400 mm	300 x 400 mm	300 x 400 mm

Property	Value, Unit	Value, Unit	Value, Unit	Value, Unit	Value, Unit
Maximum size	2040 x 3600 mm	Dependent on application	Dependent on application	Dependent on application	Dependent on application
Burglar resistance (EN 356)	P1A	n/a	n/a	P1A	P1A
Resistance to fire (EN 13501-2)	EI 47-3	EW13-1	EI 18-2	EI 25-3	EI 32-2
Pendulum body impact resistance (EN 12600)	1B1	1B1	1B1	1B1	1B1
Direct air borne sound reduction (EN 12758): Rw (C;Ctr)	46 dB	37 dB	Not measured	42 dB	43 dB
Solar transmittance, g-value (EN 410)	0.56	0.75	0.69	0.62	0.63
U value (EN 673)	4.6 W/m ² K	5.5 W/m ² K	5.6 W/m ² K	5.4 W/m ² K	5.2 W/m ² K
Temperature range	-10 to +45 °C	-10 to +45 °C	-10 to +45 °C	-10 to +45 °C	-10 to +45 °C

Main Product Contents


The table below shows the average raw material input breakdown of the Pyroguard T-range products, as modelled:

Material/Chemical Input	Mass (%)
Flat Glass	77
Silicate	12
Fire resistant gel	9
Spacer	1
Sealant	1

Manufacturing Process

The raw material uncoated plate glasses are toughened by heating and rapidly cooling within a toughening oven. A fire-resistant nano composite gel interlayer is sandwiched between the glasses which contain a spacer system to allow for the designated thickness of gel to be achieved. Multiple layers of nano composite gel interlayer and glass are combined depending on the fire resistance required. The glasses are then cured in an oven and cooled on a racking system before packaging and dispatch.

Process flow diagram

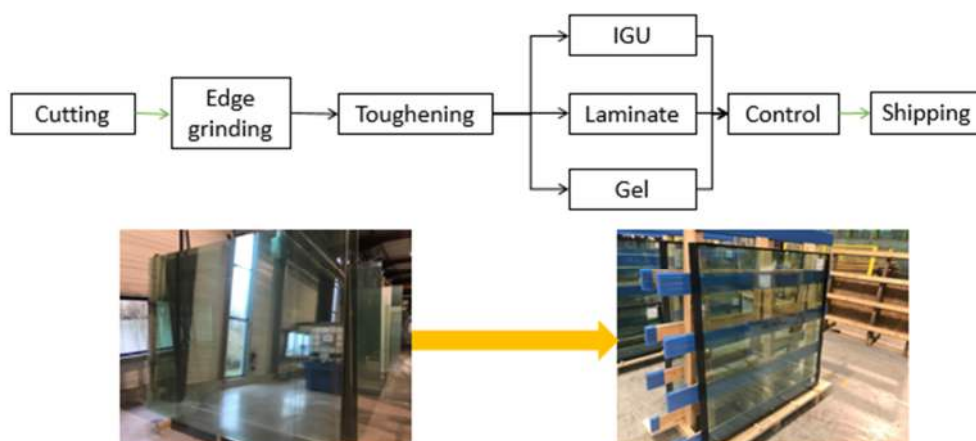

Those are the 6 major steps of the production process

Life Cycle Assessment Calculation Rules

Declared / Functional unit description

1m² of Pyroguard T-range product of a weight of up to 96 kg/m². The declared unit represents the average composition of all the products in the Pyroguard T-range as made during the stated production period, modelled at the weight of the heaviest product in the range; the Pyroguard T EI 47-3 product.

System boundary

This is a cradle-to-gate EPD, reporting all production life cycle stages (modules A1 to A3) in accordance with EN 15804:2012+A1:2013.

Data sources, quality and allocation

This is a cradle-to-gate LCA follows the modular design defined in EN 15804:2012+A1:2013. The LCA models and reports the production stage modules, A1 to A3. No inputs or outputs have been excluded and all raw materials, packaging and transport, energy, water use and wastes, are included, except for direct emissions to air, water and soil, which are not measured.

The silicate quantities provided are solid content (the solids content of the silicate dispersion is 47.3%) and it is the dry content that has been provided and modelled. In the absence of a background dataset in ecoinvent 3.2 for the Gevarsil 2270-Silicate (Potassium silicate dispersion), the Sodium Silicate dataset (Sodium silicate, without water, in 48% solution state {RER}) sodium silicate production, hydrothermal liquor, product in 48% solution state | Alloc Def, U) used as proxy as it is similar in chemical properties.

In the absence of a background dataset in ecoinvent 3.2 for the TPS Spacer – polyisobutylene, the Butene dataset (Butene, mixed {RER}) production | Alloc Def, U) was used as a proxy as it is the monomer of polyisobutylene.

For the French site, 12 months of manufacturing data, from 1st April 2018 to 1st April 2019 were available, whilst for the UK site, which is new, manufacturing data from 1st January 2019 to 1st April 2019 were available.

At both the French and UK manufacturing sites, only products in the Pyroguard T range are made. Therefore, total site figures for raw materials, packaging, energy, water, wastewater and solid wastes were used, and no allocation was required.

Within the Pyroguard T range, specific products can vary based the thickness and number of layers of glass and intumescent, meaning that the total mass per m² varies across the range. The mass per m² of the heaviest product, the Pyroguard T 47-3 product, at 96 kg/m², was used to represent the weight of the range, and will provide results covering the worst case scenario in terms of total product mass.

The mass balance for the French site was found to be low on inputs because wastage of glass and polysulphide sealant was not covered by the inputs. These quantities were therefore added to the respective inputs. The mass balance for the UK site was found to be acceptable.

Secondary data has been drawn from the BRE LINA database v2.0.53 and the background LCI datasets are based on ecoinvent v3.2 (2015).

Cut-off criteria

No inputs or outputs have been excluded and raw material or energy flows omitted. All raw materials and packaging inputs, plus their transport, process and general energy and water use, production and non-production waste, have been included, except for direct emissions to air, water and soil, which are not measured.

LCA Results

The results per declared unit (1m²) based on total site data and the weight per m² of the heaviest product, the Pyroguard T EI 47-3 product, can be found in the following tables:

(MND = module not declared; MNR = module not relevant; INA = indicator not assessed; AGG = aggregated)

Parameters describing environmental impacts									
			GWP	ODP	AP	EP	POCP	ADPE	ADPF
			kg CO ₂ equiv.	kg CFC 11 equiv.	kg SO ₂ equiv.	kg (PO ₄) ³⁻ equiv.	kg C ₂ H ₄ equiv.	kg Sb equiv.	MJ, net calorific value.
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	112	2.31E-05	0.858	0.166	0.0575	8.07E-04	1530

GWP = Global Warming Potential;
 ODP = Ozone Depletion Potential;
 AP = Acidification Potential for Soil and Water;
 EP = Eutrophication Potential;

POCP = Formation potential of tropospheric Ozone;
 ADPE = Abiotic Depletion Potential – Elements;
 ADPF = Abiotic Depletion Potential – Fossil Fuels.

Parameters describing resource use, primary energy								
			PERE	PERM	PERT	PENRE	PENRM	PENRT
			MJ	MJ	MJ	MJ	MJ	MJ
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	154	2.36E-03	154	2200	0	2200

PERE = Use of renewable primary energy excluding renewable primary energy used as raw materials;
 PERM = Use of renewable primary energy resources used as raw materials;
 PERT = Total use of renewable primary energy resources;

PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials;
 PENRM = Use of non-renewable primary energy resources used as raw materials;
 PENRT = Total use of non-renewable primary energy resource.

LCA Results (continued)

Parameters describing resource use, secondary materials and fuels, use of water						
			SM	RSF	NRSF	FW
			kg	MJ net calorific value	MJ net calorific value	m ³
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	0	0	0	1.66

SM = Use of secondary material;
RSF = Use of renewable secondary fuels;

NRSF = Use of non-renewable secondary fuels;
FW = Net use of fresh water.

Other environmental information describing waste categories						
			HWD	NHWD	RWD	
			kg	kg	kg	
Product stage	Raw material supply	A1	AGG	AGG	AGG	
	Transport	A2	AGG	AGG	AGG	
	Manufacturing	A3	AGG	AGG	AGG	
	Total (of product stage)	A1-3	18.10	9.53	1.47E-02	

HWD = Hazardous waste disposed;
NHWD = Non-hazardous waste disposed;
RWD = Radioactive waste disposed.

Other environmental information describing output flows – at end of life						
			CRU	MFR	MER	EE
			kg	kg	kg	MJ per energy carrier
Product stage	Raw material supply	A1	AGG	AGG	AGG	AGG
	Transport	A2	AGG	AGG	AGG	AGG
	Manufacturing	A3	AGG	AGG	AGG	AGG
	Total (of product stage)	A1-3	0	5.65	0.0265	0

CRU = Components for reuse;
MFR = Materials for recycling;

MER = Materials for energy recovery;
EE = Exported energy.

References

- BSI. Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products. BS EN 15804:2012+A1:2013. London, BSI, 2013.
- BSI. Environmental labels and declarations – Type III Environmental declarations – Principles and procedures. BS EN ISO 14025:2010 (identical to ISO 14025:2006). London, BSI, 2010.
- BSI. Environmental management – Life cycle assessment – Principles and framework. BS EN ISO 14040:2006. London, BSI, 2006.
- BSI. Environmental management – Life cycle assessment – Requirements and guidelines. BS EN ISO 14044:2006. London, BSI, 2006.
- BSI. Glass in building. Security glazing. Testing and classification of resistance against manual attack. BS EN 356:2000. London, BSI, 2000.
- BSI. Fire classification of construction products and building elements. Classification using data from fire resistance tests, excluding ventilation services. BS EN 13501-2:2016. London, BSI, 2016.
- BSI. Glass in building. Pendulum test. Impact test method and classification for flat glass. BS EN 12600:2002. London, BSI, 2002.
- BSI. Glass in building. Glazing and airborne sound insulation. Product descriptions and determination of properties. BS EN 12758:2011. London, BSI, 2011.
- BSI. Glass in building. Determination of luminous and solar characteristics of glazing. BS EN 410:2011. London, BSI, 2011.
- BSI. Glass in building. Determination of thermal transmittance (U value). Calculation method. BS EN 673:2011. London, BSI, 2011.