

Pyroguard Rapide


• FD60

EN14449 LAMINATED SAFETY GLASS



Classification: E

Offers effective and economical protection from flames and smoke, but does not prevent the transmission of heat in the event of a fire.

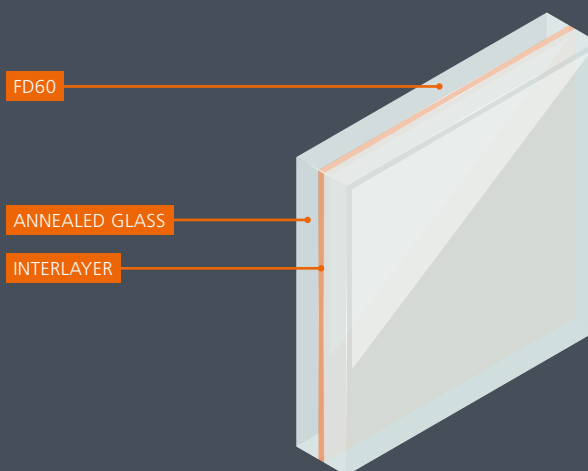

Fire resistance
E60



Cuttability
glass



Weight
22 kg/m²



Sound reduction
33 dB



Impact resistance
3B3



Light transmission
86%



Temp range
-20°C/+100°C

CHARACTERISTICS	FD60
FIRE RESISTANCE (EN 13501-2)	E60
GLASS PRODUCTION SIZE MIN - MAX (mm)	100 x 100 1580 x 2780
THICKNESS AND TOLERANCE (mm)	9 (-0.6/+0.8)
WEIGHT (kg/m ²)	22
R _w (C;Ctr) SOUND REDUCTION (EN 140-3)	33
T _v LIGHT TRANSMISSION (EN 410) (%)	86
U _g VALUE (EN 673) W/m ² K	5.7
TEMPERATURE RANGE (°C)	-20/+100
IMPACT RESISTANCE (EN 12600)	3B3
UV STABILITY (EN ISO 12543-4)	✓
CE CERTIFICATE OF CONFORMITY	0336-CPR-9134